

Art. 3860 MANGUITO ANTI ELECTROLISIS

Art.3860 ANTI ELECTROLYSIS FITTING

Características

Estos manguitos garantizan la eliminación de pares galvánicos producidos en una conducción mixta en la que existan elementos de diferente naturaleza y composición. Adaptados para cualquier tipo de instalación hidráulica, de calefacción o neumática.

Ideal para agua caliente o fría, aceites varios y aire comprimido.

- *Temperatura mínima y máxima de ejercicio:*
 - Aire: $-10 \div +90^{\circ}\text{C}$.
 - Agua: $0 \div +80^{\circ}\text{C}$.
- *Rosca interiores: roscadas bajo norma ISO 228*
- *Presión de trabajo nominal*
 - PN-10


Features

These sleeves guarantee the elimination of produced galvanic pairs in a mixed conduction in which elements of different

Adapted nature and composition for any type from hydraulic installation exist, of pneumatic heating or.

Ideal for hot water or fries, oils several and compressed air

- *Temperature minimum and maximum of exercise:*
 - Air: $-10 \div +90^{\circ}\text{C}$.
 - Water: $0 \div +80^{\circ}\text{C}$.
- *Inner threaded under norm ISO 228*
- *Pressure of nominal work*
 - PN -10

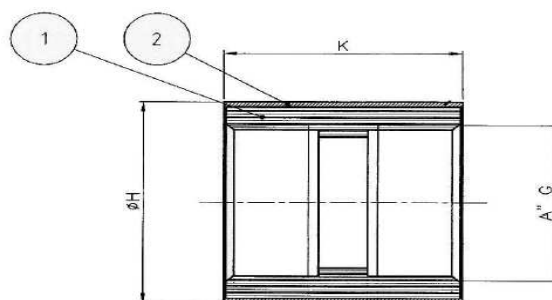

Nº	Denominación /Name		Material	
1	FUNDA	COVER	Cobre	Copper
2	CUERPO	BODY	Nylon 6+30% + fibra de vidrio	Nylon 6+30% + fiver glass

Ref	Dimensiones /Dimensions (mm)				Peso/Weight (g)
	A	P	K	Ø H	
3860 04	1/2"	15	39.0	28	39
3860 05	3/4"	20	39.0	35	51
3860 06	1"	25	43.0	42	75
3860 07	1 1/4"	32	59.4	54	162
3860 08	1 1/2"	40	59.4	62	227
3860 09	2"	50	76.6	80	459
3860 10	2 1/2"	65	86.6	95	610
3860 11	3"	80	95.0	112	1415
3860 12	4"	100	134.0	146	1458

Ecoterme - Equipamentos e Instalações Térmicas, Lda.

RUA DOS SELÕES

CONDOMINIO TERRUGEM PARK II, ARMAZÉM B1

Vila Verde

2706-501 TERRUGEM SNT - PORTUGAL

TELF.: 351 21 9605700 (BUSCA AUT.)

FAX.: 351 21 9605709

www.ecoterme.pt