

VÁLVULAS DE GLOBO PEGLER 1029



1029 GUNMETAL GLOBE VALVES



Pressure/Temperature Rating (Max Working)

BS 5154 PN32 Series B/NM
14 Bar at 198°C. (Hot)
32 Bar from -10 to 100°C. (Cold)

Test Pressures (Hydraulic) to BS 5154

Shell: 48 Bar Seat: 35.2 Bar

Specification

Rising stem.
Non metallic renewable disk.
High quality lubricated packing.
Can be re-packed under pressure.
BS 21 Taper Thread.
Available with American Taper
Thread or BS 21 Parallel Thread on
request.

Size Range


1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2*	3*	4*
○	○	○	○	○	○	○	○	○	○	○

*No American Thread

Suitable for

Steam	Water	Oil	Air	Gases
○	○	○	○	○

Special test required for air or gases

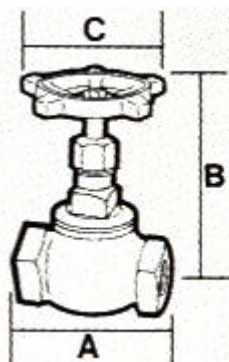

Dimensions

Nominal Size		1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2*	3*	4*
Face to Face	A mm	52	52	60	70	83	98	106	132	171	205	238
Height Open	B mm	85	85	105	110	130	150	170	190	220	225	290
H'Wheel Diam.	C mm	60	60	70	75	85	95	105	120	155	180	230
Weight Approx.	kg	0.28	0.28	0.44	0.65	1.03	1.56	2.11	3.43	7.93	9.46	17.16

*Size 2 1/2, 3 & 4 Valves are not Kitemarked. In addition size 4 is not covered by BS 5154.