




ROTAMETROS DE PLASTICO

Modelo
R-009

TABLA DE CAUDALES - ESCALAS NORMALIZADAS

R	Flotador AISI-316		Flotador Aluminio	PRES MAX. Bar	PERDIDA CARGA mm. c.c.		L
	Agua 20° C. l/h	Aire 20° C. Nm³/h	Aire 20° C Nm³/h		Flot. Inox	Flot. Alu.	
½"	4 - 50	0'2 - 1'5	0'09 - 0'8	10	90	35	350
	24 - 120	0'7 - 3'6	0'45 - 2				
	30 - 300	1 - 9	0'80 - 5				
1"	50 - 400	1'5 - 10	1 - 7	10	125	50	360
	60 - 660	3 - 18	2 - 10				
	100 - 1000	3 - 25	2 - 15				
1"	150 - 1600	4'5 - 45	3 - 25	10	175	75	360
	250 - 2500	8 - 70	5 - 40				
2"	500 - 4000	15 - 120	8 - 70	10	260	110	376
	600 - 6000	25 - 180	10 - 100				
	1000 - 10000	30 - 300	20 - 180				
2"	3000 - 14000	-----	-----	10	580	430	376
	4000 - 16000	-----	-----				
	6000 - 21000	-----	-----				
	8000 - 25000	-----	-----				

MATERIALES

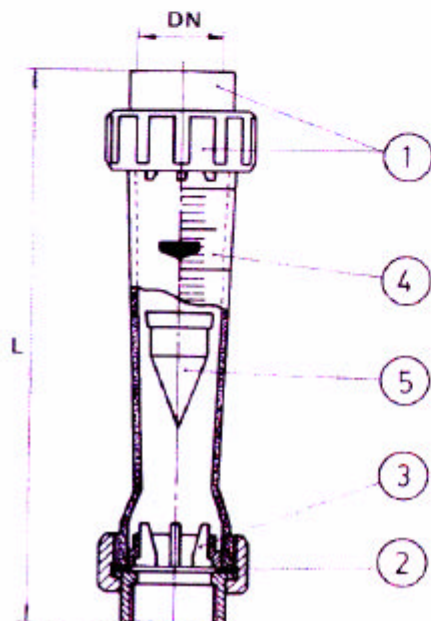

PIEZA	DENOMINACION	MATERIALES	
		NORMALIZADO	ESPECIAL
1	CABEZAL	PVC	PVC
2	JUNTAS	EPDM	VITON
3	TOPES	PVC	PVC
4	TUBO MEDIDA	TROGAMID	POLYSULFON
5	FLOTADOR	AISI-316	PVC, AISI-316