



VÁLVULAS SECC. GLOBO BRONZE/BRONZE

100 LBS BRONZE GLOBE VALVE, (PN 16)
RISING STEM, INSERTED BONNET, SCREWED ENDS

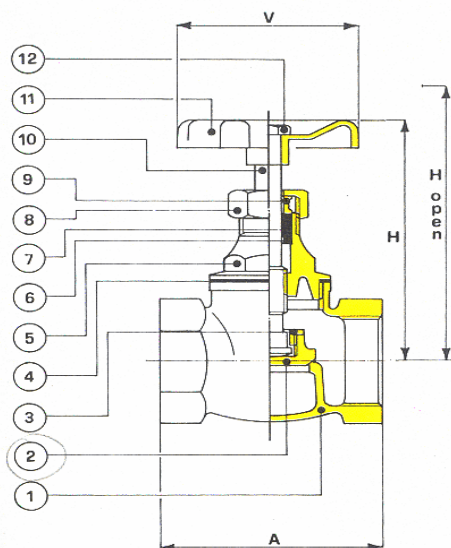


art. 6140

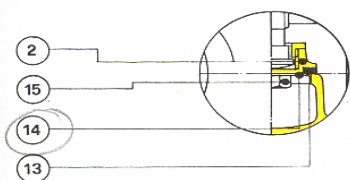

art. 6150

HYDROSTATIC TEST PRESSURES		WORKING PRESSURES
SHELL	SEAT	W.O.G. NON SHOCK
350 p.s.i.	225 p.s.i.	225 p.s.i.

NOTES

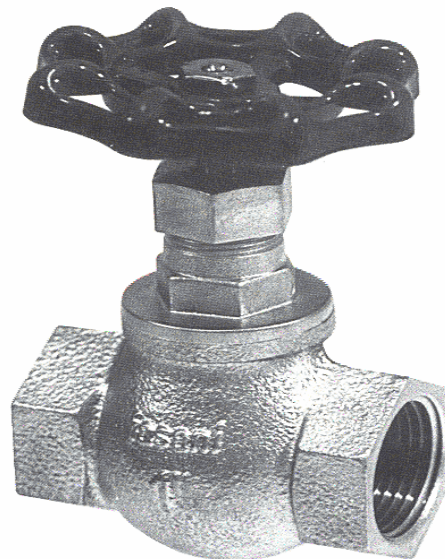

NOMENCLATURE	MATERIALS	ASTM
1 Body	Bronze	B.62
2 Disc	Brass	B.283
3 Stem Retaining Ring	Brass	B.16
4 Gasket	Fiber	
5 Bonnet	Brass	B.283
6 Retaining Ring	Brass	B.16
7 Packing	P.T.F.E.	
8 Gland Packing Nut	Brass	B.16
9 Gland Follower	Brass	B.16
10 Stem	Brass	B.16
11 Handwheel	Laquered Steel	A.105
12 Handwheel Nut	Steel	A.105
13 Soft Seal	P.T.F.E.	
14 Washer	Steel	A.105
15 Nut	Steel	A.105

DIMENSIONS

	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A	46	50	50	55	64	73	84	90	150	167	190
H	64	64	64	69	82	99	107	120	175	192	215
H open	71	71	71	78	94	111	126	142	211	232	265
V	50	50	50	50	60	60	65	80	120	120	140